



altro
transflor

the future is safer with altro

Altro Transflor Momentum™


www.altrotransflor.com




Altro Transflor Momentum™




Quattro
MOM2001 (2mm), MOM2501 (2.5mm)
WR249 / A1M249 / LRV 15

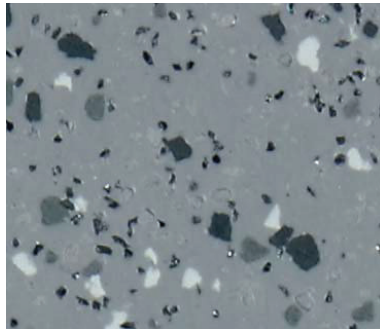


Elan
MOM2002 (2mm), MOM2502 (2.5mm)
WR81 / A1M81 / LRV 26

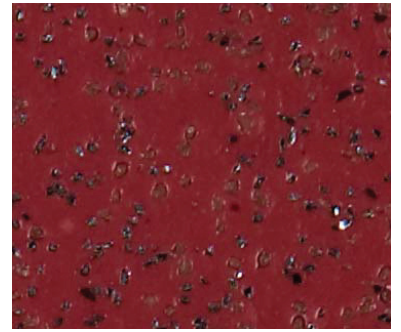


Sprint
MOM2003 (2mm), MOM2503 (2.5mm)
WR248 / A1M238 / LRV 12

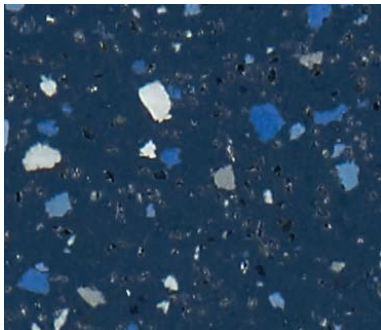


Capri
MOM2004 (2mm), MOM2504 (2.5mm)
WR231 / A1M73 / LRV 11

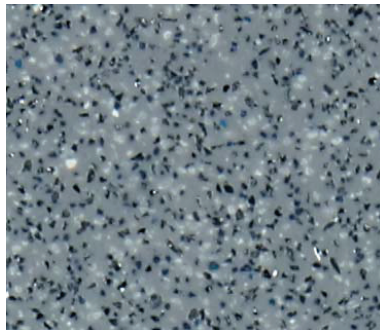


Fog
MOM2005 (2mm), MOM2505 (2.5mm)
WR81 / A1M81 / LRV 27

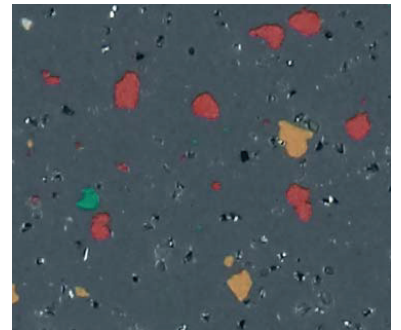


Cyber
MOM2006 (2mm), MOM2506 (2.5mm)
WR83 / A1M83 / LRV 14

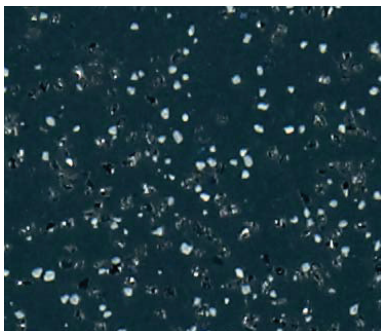


Midnight
MOM2007 (2mm), MOM2507 (2.5mm)
WR72 / A1M72 / LRV 8

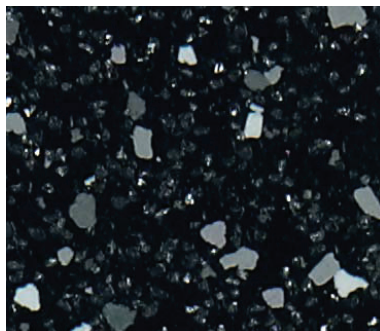


Phantom
MOM2008 (2mm), MOM2508 (2.5mm)
WR100 / A1M100 / LRV 7

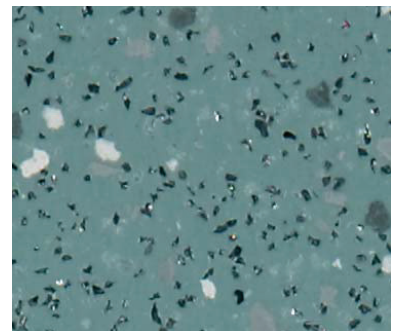


Thema
MOM2009 (2mm), MOM2509 (2.5mm)
WR52 / A1M52 / LRV 24

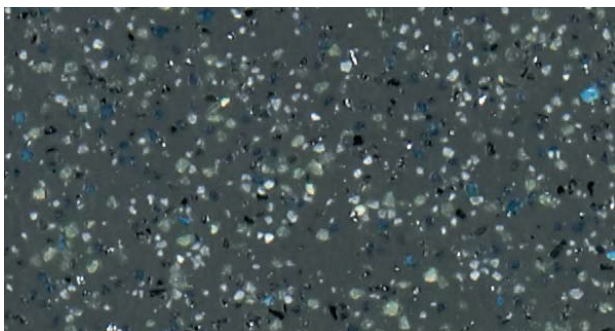

Storm
MOM2010 (2mm), MOM2510 (2.5mm)
WR82 / A1M82 / LRV 16

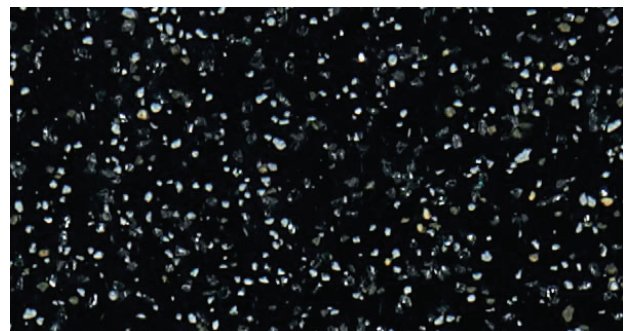

Black
MOM2011 (2mm), MOM2511 (2.5mm)
WR100 / A1M100 / LRV 7

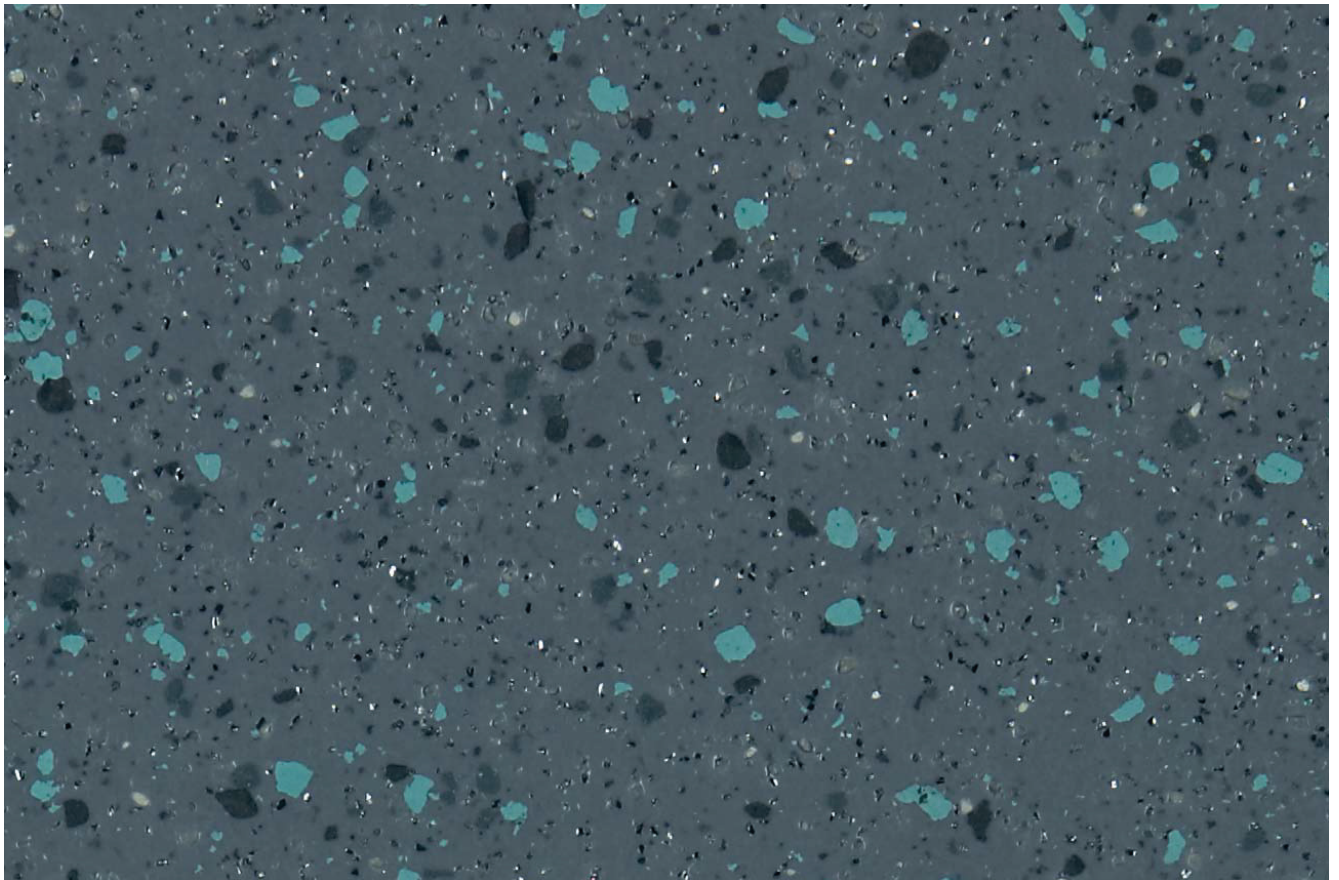

Zeal
MOM2012 (2mm), MOM2512 (2.5mm)
WR83 / A1M83 / LRV 15

Please note: the 2.5mm version is available from stock, the 2mm is available to order.
Products available in kit and roll format.
Please call to discuss your bespoke options, such as custom-made colours or made-to-order lengths and widths.

Altro Limited,
Works Road, Letchworth Garden City,
Herts, SG6 1NW, England
Tel: +44 1462 707600
Fax: +44 1462 480010
e-mail: transflor@altro.com
www.altrotransflor.com

Altro Transflor - USA,
12648 Clark Street,
Santa Fe Springs, CA 90670
Tel: 1-800-382-0333
Fax: 1-562-944-8720
Email: Transflor@altrofloors.com
www.altrotransflor.com

Altro Australia,
3 St. Andrews Court, Rowville,
Victoria 3178, Australia
Tel: +61 3 9764 5666
Fax: +61 3 9764 5655
e-mail: info@asf.com.au
www.asf.com.au















Altro GmbH,
Krausestrasse 108,
D-22049 Hamburg, Germany
Tel: +49 40 51 49 49 0
Fax: +49 40 51 49 49 49
e-mail: welcome@altro.de

Altro Transflor - Canada,
6221 Kennedy Road, Unit 1,
Mississauga, ON, L5T 2S8
Tel: 1-800-565-4658
Fax: 1-905-564-0750
Email: Transflor@altrofloors.com
www.altrotransflor.com

Altro China,
Suite 11N19-2, Level 11,
Shanghai Mart No. 2299,
West Yan'an Road,
Shanghai 200336
Tel: + 86 (0)21 62363138
Fax: +86 (0)21 62363136
e-mail: altrochina@asf.com.au
www.altrochina.com

Altro Nordic AB,
Box 9055, S-200 39 Malmö, Sweden
Tel: +46 40 31 22 00
Fax: +46 40 94 93 64
e-mail: info@altro.se

Exact material match with samples cannot be guaranteed.
No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.
Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.


Flooring Type Tipo de pavimento Belagsart		EN13845	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag
Slip Resistance Resistencia al deslizamiento Rutschsicherheit		TRRL DIN 51130 EN13845 ASTM D2047	≥ 40 R10 ESf ≥0.6
Thickness Espesor Total Gesamtdicke		EN 428	2mm / 0.08" 2.5mm / 0.10"
Wear Layer Capa de uso Nutzschicht		EN 429	1.0mm 0.04"
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme geeignet
Weight Peso Flaechengewicht		EN 430	2.5kg / m ² or 4.60lb / yd ² 3.0kg / m ² or 5.53lb / yd ²
Roll Dimensions Dimensiones del rollo Rollenabmessungen		EN 426	2m x 20m - 40m ² 66'x6.58'
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6
Wear Resistance Abrasión Verschleißverhalten		EN13845 Annex D	≤10% Particles lost over 50,000 cycles ≤10% de las partículas perdidas en 50,000 ciclos ≤10% Partikelverlust bei 50.000 Umdrehungen
Indentation Punzonamiento Resteindruck		EN 433	≤ 0.1mm ≤ 0.004"
Fire Performance Reacción al fuego Brandverhalten		EN ISO 9239-1 EN 45545 DIN 5510 ASTM E648 ASTM E662 BS 6853	≥8kW/m ² HL2 SF3 FED ≤1 Class 1 / Clase 1 / Klasse 1 Ds @ 1.5min ≤100 Ds @ 4min ≤200 Category Ia
Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung		EN 425	Good Buena beständig
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet
Dimensional Stability Estabilidad dimensional Formstabilität		EN 434	≤0.4%

Installation and Maintenance

All installations in accordance with local standards and Altro Transflor installation instructions.
Joints - all heat welded. Subfloor and adhesives - as recommended in Altro Transflor installation instructions or visit www.altrotransflor.com.

Note: Failure to install and maintain Altro flooring in accordance with 'Altro Transflor installation instructions' can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

*Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Altro Transflor are not recommended for areas where lighted cigarette ends are likely to be left or trodden into the floor.

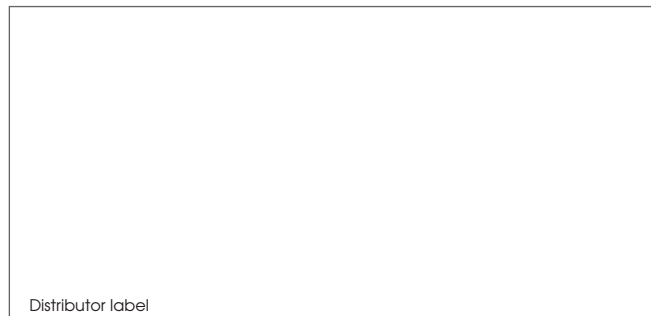

Distributor label



2mm



2.5mm



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

For further technical information please visit www.altrotransflor.com

Si desea obtener más información técnica, visite www.altrotransflor.com

Weitere technische Informationen finden Sie auf unserer Website www.altrotransflor.com

