



altro

the future is safer with altro


Altro Stronghold™ 30/
Altro K30
contains recycled material




Altro is the first safety flooring manufacturer to recycle traditional safety flooring in-house

Altro Stronghold™ 30/Altro K30


Safety Flooring / Suelos de Seguridad / Sicherheitsbodenbelag




Monsoon K30153
WR81 / A1M81 / LRV24




Dolphin K3010
WR86 / A1M86 / LRV21




Abyss K3001
WR100 / A1M100 / LRV7




Oyster K30215
WR20 / A1M20 / LRV36




Skyline K30332
WR52 / A1M52 / LRV24




Tundra K30500
WR153 / A1M239 / LRV17




Camel K3017
WR64 / A1M239 / LRV26




Surf K30412
WR71 / A1M71 / LRV20




Lagoon K30910
WR39 / A1M34 / LRV7



Maple K30522
WR24 / A1M27 / LRV31



Russet K30262
WR41 / A1M41 / LRV14



Velvet K30365
WR256 / A1M148 / LRV8


















Exact Material Match with samples cannot be guaranteed.
No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.
Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.

www.altro.com

A+ BRE Generic Green Guide
Rating for Safety Flooring,
full details available at
www.thegreenguide.org.uk

All Altro safety flooring
contains recycled content




| | | | |
|--|---|---|---|
| Flooring Type Tipo de pavimento Belagsart |  | EN 13845/ EN 13553 | Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag |
| Classification for use Areas de uso Einsatzbereiche |  | EN 685 | 34 & 43 34 y 43 34 & 43 |
| Slip Resistance Resistencia al deslizamiento Rutschsicherheit* |  | TRRL / CTE EN 13845 EN 13893 DIN 51130 | > 50. Class 3 / Clase 3 / Klasse 3 (CTE) Esf DS R12 |
| Thickness Espesor Total Gesamtdicke |  | EN 428 | 3 mm |
| Wear Layer Capa de uso Nutzschicht |  | EN 429 | 3 mm |
| Weight Peso Flaechengewicht |  | EN 430 | 3,4 kg/m ² 3,4 kg/m ² 3,4 kg/m ² |
| Roll Dimensions Dimensiones del rollos Rollenabmessungen |  | EN 426 | 2 m x 15 m = 30 m ² |
| Light Fastness Resistencia a la luz Lichtechtheit |  | EN 20105-B02 | >6 |
| Sound Insulation Aislamiento acústico Trittschal |  | ISO 140-8 | 10 dB |
| Wear Resistance Abrasión Verschleißverhalten |  | EN 13845 EN660-2 | Group 34/43, Grupo 34/43 / Gruppe 34/43 Group T / Grupo T / Gruppe T |
| Indentation Punzonamiento Resteindruck |  | EN 433 | < 0.10mm |
| Fire Performance Reacción al fuego Brandverhalten |  | EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 | Class Bfl s1 >8kw/m ² Pass Clase Bfl s1 >8kw/m ² Conforme Klasse Bfl-s1 >8kW/m ² , bestanden |
| Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung** |  | EN 423 | Good Buena beständig |
| Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung |  | EN 425 | Pass Conforme geeignet |
| Under floor heating Calefacción por el suelo Fußbodenheizung |  | EN 12667 | Suitable Apto geeignet |
| Electrical Behaviours Características eléctricas Elektrisches Verhalten |  | EN1815 | < 2 kV Antistatic < 2 kV Antiestáticas < 2 kV antistatisch |
| VOC Emissions Emisiones de VOC VOC Emissionen |  | prEN 15052 Section 01350 AgBB/DiBt | Low/Pass/Approved Baja/Conforme/Aprobado gering/geeignet/zugelassen |

*For wet areas where bare foot slip resistance is required such as showers and swimming pool surrounds, we recommend the use of Altro Marine™ 20/T20. **Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Contains Biocide.

Installation and Maintenance

All Installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro floors in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

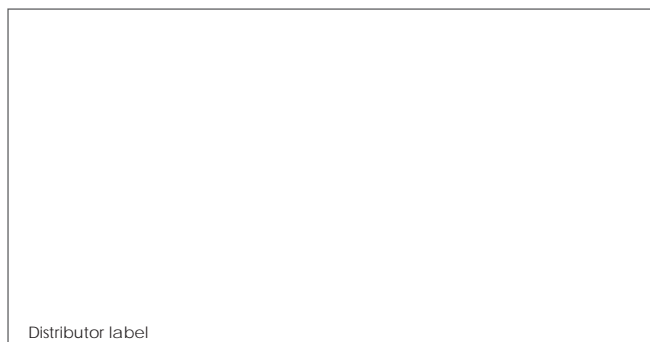

For further technical information please visit www.altro.com
Si desea obtener más información técnica, visite www.altroscandess.com
Weitere technische Informationen finden Sie auf unserer Website www.altro.de

Altro, the future is safer with altro, Altro Stronghold 30/Altro K30, Altro Marine 20/T20 and Altrosan are trademarks of Altro Limited.



EN13845