




the future is safer with altro


altro

NEW
Xtreme heavy
duty solution,
plus PUR


Altro Unity™ 25 Safety Flooring / Suelos de Seguridad / Sicherheitsbodenbelag




Arena UB2510
WR297 / A1M20 / LRV 41




Statue UBI2513
WR304 / A1M12 / LRV 62




Plaza UBI2512
WR27 / A1M27 / LRV 32




Gallery UB2511
WR62 / A1M62 / LRV 10




Ice Rink UBI2514
WR291 / A1M01 / LRV 70




Monument UBI2508
WR305 / A1M239 / LRV 23



Signal UBI2516
WR300 / A1M42 / LRV 13



Forge UB2515
WR248 / A1M238 / LRV 9




Streetlight UBI2505
WR287 / A1M79 / LRV 45




Rock UBI2504
WR84 / A1M84 / LRV 23




Temple UB2509
WR261 / A1M81 / LRV 27




Pavement UBI2507
WR83 / A1M83 / LRV 14




Stream UB2501
WR288 / A1M71 / LRV 22



Fountain UBI2502
WR306 / A1M71 / LRV 22



Pool UBI2503
WR307 / A1M73 / LRV 10



Runway UB2506
WR72 / A1M72 / LRV 9



Roof Garden UB2500
WR262 / A1M154 / LRV 23



Vault UBI2517
WR277 / A1M100 / LRV 5




















Light Reflectance Values (LRVs)
measured in accordance
with BS8493:2008

Exact material match with samples cannot be guaranteed.
No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.
Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.

Altro is the first safety
flooring manufacturer to
recycle traditional safety
flooring in-house

A+ BRE Generic Green Guide
Rating for Safety Flooring, full
details available at
www.thegreenguide.org.uk

Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag
Classification for use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43
Slip Resistance* Resistencia al deslizamiento* Rutschsicherheit*		TRRL EN 13845 EN 13893 DIN 51130	≥ 36 ESf DS R10
Thickness Espesor Total Gesamtdicke		EN 428	2.5 mm
Wear Layer Capa de uso Nutzschicht		EN 429	2.5 mm
Weight Peso Flächengewicht		EN 430	3.1 kg/m ²
Roll Dimensions Dimensiones del rollo Rollenabmessungen		EN 426	2 m x 20 m = 40 m ²
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	7 dB
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6
Wear Resistance Abrasión Verschleißverhalten		EN 13845	≤10% particles lost over 50000 Cycles ≤10% de las partículas perdidas en 50.000 ciclos ≤10% Partikel werden über 50000 Umdrehungen verloren
Indentation Punzonamiento Resteindruck		EN 433	≤ 0.10mm
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥8kW/m ² Pass Clase Bfl-s1 ≥8kW/m ² Conforme Klasse Bfl-s1 ≥8kW/m ² bestanden
Chemical Resistance** Resistencia a los productos químicos** Chemikalieneinwirkung**		EN 423	Good Buena beständig
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN 1815	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch

* We recommend the use of Altro Aquarius™ for combined shoe and barefoot use in wet and dry areas such as hospital bathrooms and Altro Marine™ 20 / T20 for barefoot use in wet areas such as swimming pool surrounds.

** Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance.


Installation and Maintenance

All Installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

This product has never contained phthalate plasticisers. Contains bacteriostat.

All information is correct at the time of print and is subject to change without prior notice.

Visit us at www.altro.com for more information and updates.

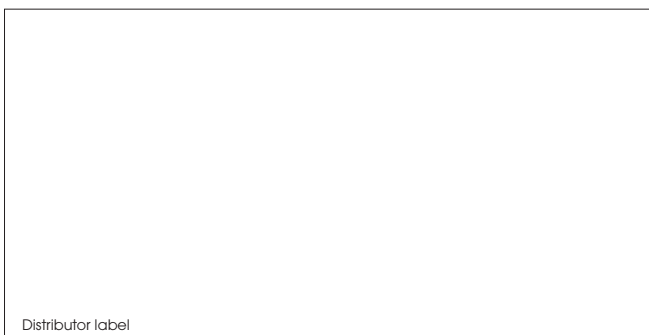

Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



For further technical information please visit www.altro.com
 Si desea obtener más información técnica, visite www.altroscandess.com
 Weitere technische Informationen finden Sie auf unserer Website www.altro.de

EN13845