



altro


the future is safer with altro

Xtreme heavy duty solution, with NEW R11


Altro is the first safety flooring manufacturer to recycle traditional safety flooring in-house

Altro Designer 25/D25 - R10


Altro Legend Range




Storm D25903
WR82 / A1M82 / LRV 16




Fog D25153
WR81 / A1M81 / LRV 27




Twilight D25910
WR39 / A1M34 / LRV 8




Midnight D25421
WR72 / A1M72 / LRV 11




Jet D2501
WR100 / A1M100 / LRV 6




Skyline D25332
WR52 / A1M52 / LRV 25



Biscuit D25904
WR146 / A1M20 / LRV 30



Bone D25215
WR20 / A1M20 / LRV 37




Rust D25907
WR150 / A1M238 / LRV 10

Altro Classic 25/X25 - R11 Altro Legend Range


Altro Atlas 40/X40 - R10

Altro Classic 25/X25 is also available in Anvil, as shown in Altro Atlas 40/X40*.


Available in Anvil and the 4 colours shown in Classic 25/X25*.




Pewter Grey*
X2539R11/X4039
WR81 / A1M81 / LRV 26



Blue
X2541R11
WR71 / A1M71 / LRV 20



Mushroom*
X2542R11/X4042
WR24 / A1M27 / LRV 32



Quarry Red *
X2560R11/X4060
WR42 / A1M42 / LRV 13



Walnut*
X2586R11/X4086
WR62 / A1M62 / LRV 10



Anvil*
X4094/X2594R11
WR101 / A1M72 / LRV 11



For decorative PUR alternative, see Altro Unity™ 25

Exact material match with samples cannot be guaranteed. No podemos garantizar que el material del suelo de seguridad coincide exactamente con el de las muestras. Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden. Light Reflectance Values (LRVs) measured in accordance with BS8493:2008


A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk

Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag		
Classification for use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43		
				D25	X25
Slip Resistance* Resistencia al deslizamiento* Rutschsicherheit*		TRRL EN 13845 EN 13893 DIN 51130	≥ 36 Esf DS R10	≥ 36 Esf DS R11	≥ 36 Esf DS R10
Thickness Espesor Total Gesamtdicke		EN 428	2.5 mm	2.5 mm	4 mm
Wear Layer Capa de uso Nutzschicht		EN 429	2.5 mm	2.5 mm	4 mm
Weight Peso Flächengewicht		EN 430	2.9 kg/m ²	2.9 kg/m ²	4.5 kg/m ²
Roll Dimensions Dimensiones del rollo Rollenabmessungen		EN 426	2 m x 20 m = 40 m ²	2 m x 20 m = 40 m ²	2 m x 12.5 m = 25 m ²
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	7 dB	5 dB	7 dB
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden		
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6		
Wear Resistance Abrasión Verschleißverhalten		EN 13845	≤10% particles lost over 50000 Cycles ≤10% de las partículas perdidas en 50.000 ciclos ≤10% Parkitel werden über 50000 Umdrehungen verloren		
Indentation Punzonamiento Resteindruck		EN 433	≤ 0.10mm		
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥8kW/m ² Pass Clase Bfl-s1 ≥8kW/m ² Conforme Klasse Bfl-s1 ≥8kW/m ² bestanden		
Chemical Resistance** Resistencia a los productos químicos** Chemikalieneinwirkung**		EN 423	Good Buena beständig		
Castor Chair Abrasion Huellas de sillas de ruedas Stuhrollenbeanspruchung		EN 425	Pass Conforme geeignet		
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet		
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN 1815	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch		
VOC Emissions Emisiones de VOC VOC Emissionen		prEN 15052 Section 01350 AgBB/DiBt	Low/Pass/Approved Baja/Conforme/Aprobado gering/geeignet/zugelassen		

* We recommend the use of Altro Aquarius™ for combined shoe and barefoot use in wet and dry areas such as hospital bathrooms and Altro Marine™ 20 / T20 for barefoot use in wet areas such as swimming pool surrounds.
** Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance.

Installation and Maintenance

All Installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover. These products have never contained phthalate plasticisers. Contain bacteriostat. All information is correct at the time of print and is subject to change without prior notice. Visit us at www.altro.com for more information and updates.

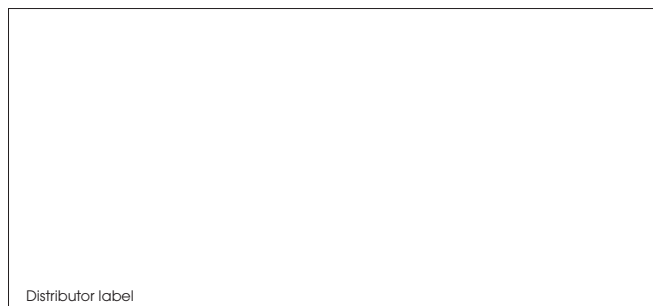

For further technical information please visit www.altro.com
Si desea obtener más información técnica, visite www.altroscandess.com
Weitere technische Informationen finden Sie auf unserer Website www.altro.de



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



Manufactured by:
Altro Ltd, Works Road
Letchworth Garden City
SG6 1NW, United Kingdom

EN13845